

Oriented acrylic hotmelts\$IO**Publication number:** DE10034069**Publication date:** 2002-02-07**Inventor:** BARGMANN RENKE (DE); ZOELLNER STEPHAN (DE); HUSEMANN MARC (DE)**Applicant:** TESA AG (DE)**Classification:****- international:** **C09J7/02; C09J133/06; C09J7/02; C09J133/06;** (IPC1-7): C09J133/08; C09J7/02**- european:** C09J7/02F2D; C09J133/06**Application number:** DE20001034069 20000713**Priority number(s):** DE20001034069 20000713; DE20001031868 20000630**Also published as:**WO0202709 (A1)
WO0202709 (A1)
WO0202709 (A1)
US7022408 (B2)
US2004038061 (A1)

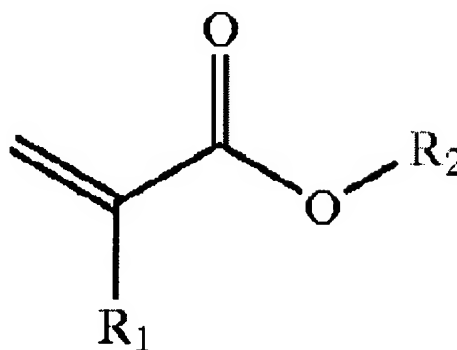
more >>

[Report a data error here](#)

Abstract not available for DE10034069

Abstract of corresponding document: **US2004038061**

A pressure sensitive adhesive obtainable by free-radical polymerization, characterized in that at least 65% by weight of the adhesive is based on at least one acrylic monomer from the group of the compounds of the following general formula: where R₁=H or CH₃ and the radical R₂=H or CH₃ or is selected from the group consisting of branched or unbranched saturated alkyl groups having 2-20 carbon atoms, the average molecular weight of the adhesive is at least 65,000, applied to a carrier, the adhesive possesses a preferential direction, where the refractive index measured in the preferential direction n_{MD} is greater than the refractive index measured in a direction perpendicular to the preferential direction n_{CD}, the difference Δn=n_{MD}-n_{CD} being at least 1.10<-5>.

Data supplied from the **esp@cenet** database - Worldwide